


PROFLO[®] ELECTRIC STORAGE

proflo small electric

SPECIFICATIONS	25S124P [^]	25S136	50S124P [^]	50S136
Storage Capacity (L)	31	31	50	50
Hot Water Delivery (L)	25	25	50	50
Net Weight Empty (kg)	17	17	23	23
Element Size (kW)	2.4	3.6	2.4	3.6
Relief Valve Pressure (kPa)	1000	1000	1000	1000
Max Inlet Pressure (kPa)	800	800	800	800

[^] Proflo Plug-in model (plugs into standard power point)

TANK DIMENSIONS (MM)	25L	50L
A Overall Height	455	670
B Overall Diameter	405	405
C Hot Water Outlet	275	490
D Cold Water Inlet	145	145
E Electrical Entry	70	70

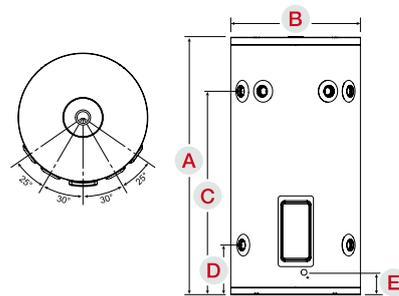


proflo large electric

SPECIFICATIONS	80T1	125X1 NARROW DIAMETER	125T1	160T1	250T1	315T1	315T2 TWIN ELEMENT	400T1	400T2 TWIN ELEMENT
Storage Capacity (L)	88	132	130	161	259	321	321	415	415
Hot Water Delivery Rating (L)	80	125	125	160	250	315	315	400	400
Twin Element Boost Capacity (L)	-	-	-	-	-	-	50	-	80
Element Sizes (kW)	1.8, 2.4, 3.6	1.8, 3.6	1.8, 3.6	2.4, 3.6	3.6	3.6	2 x 3.6 or 2 x 4.8	3.6	2 x 3.6
Net Weight Empty (kg)	41	54	51	59	72	93	93	115	115
Relief Valve Pressure (kPa)	1400	1400	1400	1400	1000	1000	1000	1000	1000
Max Inlet Pressure (kPa)	1120	1120	1120	1120	800	800	800	800	800

All Dux Proflo water heaters are dual-handed for ease of installation and operate at 240V AC single phase electricity supply.

TANK DIMENSIONS (MM)	80L	125L NARROW DIAMETER	125L	160L	250L	315L	400L
A Overall Height	925	1300	1090	1315	1445	1765	1705
B Overall Diameter	490	490	530	530	620	620	705
C Cold Water Inlet	160	160	190	190	195	195	220
D Hot Water Outlet	735	1115	865	1095	1210	1530	1445

125L NARROW DIAMETER SPECIFICATIONS



80L - 400L STANDARD MODELS

