



**Hotflo**

Electric Storage Systems



**Rinnai**

*Relax with Rinnai.*

## Benefits at a glance

- > Full range of capacities to suit all applications – 25 to 400 litres\*
- > Standard sizing perfect for emergency changeover
- > Single or twin element configurations
- > Complete range of elements and anodes
- > Dual handed for flexible installation
- > Suitable for internal and external installations<sup>#</sup>
- > 7 year cylinder warranty on 25L and 50L models
- > 10 Year on 80L to 400L models
- > Class leading Rinnai quality and durability





\*25 and 50L internal installation only.

<sup>#</sup>250L and 315L EHFA models shown.

## Product Specifications

Models		25L EHF	25L with plug EHF	50L EHF	50L with plug EHF	80L EHF	125L EHF	160L EHF	250L EHFA	315L EHFA	400L EHF
Total Height (mm)	A	452	452	694	694	900	1245	1530	1484	1770	1820
Width incl. PTR Valve (mm)		490	490	490	490	590	590	590	674	674	760
Diameter (mm)	B	415	415	415	415	515	515	515	605	605	685
Outlet Height (mm)	C	297	297	524	524	685	1020	1310	1248	1541	1545
Inlet Height (mm)	D	153	153	158	158	225	225	225	210	210	260
Electrical Entry - Lower (mm)	E	80	80	80	80	155	155	155	135	135	155
Electrical Entry - Upper (mm)	F	N/A	N/A	N/A	N/A	N/A	N/A	946	985	1225	1224
Dry Weight (kg)		20	20	27	27	43	56	66	72	83.5	102

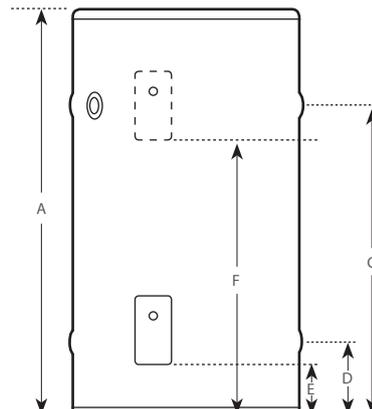

# Technical Specifications

Models	25L EHF	25L with plug EHF	50L EHF	50L with plug EHF	80L EHF	125L EHF	160L EHF	250L EHFA	315L EHFA	400L EHF	
Storage Capacity (L)	33	33	55	55	84	140	179	279	334	424	
Hot Water Delivery (L)	25	25	50	50	80	125	160	250	315	400	
Element Size (kW)*	3.6	1.8, 2.4	3.6	1.8, 2.4	1.8, 2.4, 3.6	1.8, 2.4, 3.6	1.8, 2.4, 3.6	2.4, 3.6, 4.8	3.6, 4.8	3.6, 4.8	
Boost Capacity (Twin element only) (L)	N/A	N/A	N/A	N/A	N/A	N/A	42	49	60	84	
Incl. PTR Valve (kPa)					1000			1000		850	
ECV (kPa)					850			850		700	
Max. Inlet Pressure with ECV (kPa)					680			680		550	
PLV with ECV (kPa)					500						
Max. Inlet Pressure without ECV (kPa)					800			800		680	
PLV without ECV (kPa)					500						
Max. Thermostat Setting (°C)					75			70		75	
Ingress Protection Rating					IPX4						
Electrical Supply					240V - @50Hz						
Tank Body Colour	White	White	White	White	Dune	Dune	Dune	Dune	Dune	Dune	
Port Size (mm)					20						

\*Hard water anodes available on most models.

\*Internal 250L and 315L EHFA models shown.

## Warranty\*

	25L & 50L	80L, 125L, 160L, 250L, 315L & 400L
Parts and Labour	1 Year	1 Year
Cylinder	7 Years	10 Years

\*Please note: Rinnai Australia reserves the right to make modifications and change specifications without notice. However, we will endeavour to communicate major changes well before implementation. Dimensions are subject to production tolerances and may vary slightly from those given. For full definitions of Domestic and Commercial use along with the full warranty conditions and exclusions, please refer to the owners manual. The images reproduced in this brochure are not to scale and may vary to the colour of the represented product.

**Rinnai Australia Pty Ltd**

ABN 74 005 138 769

100 Atlantic Drive,  
Keysborough, Victoria 3173

For further information visit

**[www.rinnai.com.au](http://www.rinnai.com.au)**

or call 1300 555 545

**Rinnai**

*Relax with Rinnai.*