

# STIEBEL ELTRON

## Efficient hot water made simple

High efficiency, low impact — R290  
refrigerant and WiFi control



## SHP-O 200/300 Plus

HOT WATER HEAT PUMP

### Efficient Hot Water, Intelligent Control

This sleek, reliable heat pump delivers efficient hot water while reducing reliance on gas by harnessing ambient air heat. It uses the eco-friendly R290 refrigerant and maximises energy savings, particularly when combined with a solar PV system. With built-in WLAN connectivity, you can control and monitor the system remotely via the MyStiebel App. Installers can also adjust settings through the Servicewelt portal, often without the need for an on-site visit.


### Product features

- › Heats water efficiently year-round
- › Available in 200 L and 300 L
- › R290 refrigerant with low GWP
- › Control and monitor hot water from anywhere with the MyStiebel App
- › Quiet operation, perfect for recirculation air mode
- › Solar PV compatible - optimises self-consumption
- › Low running costs (optimised recirculation)
- › Hygiene program and timer function
- › Smart element with end user options



MyStiebel App

ServiceWelt

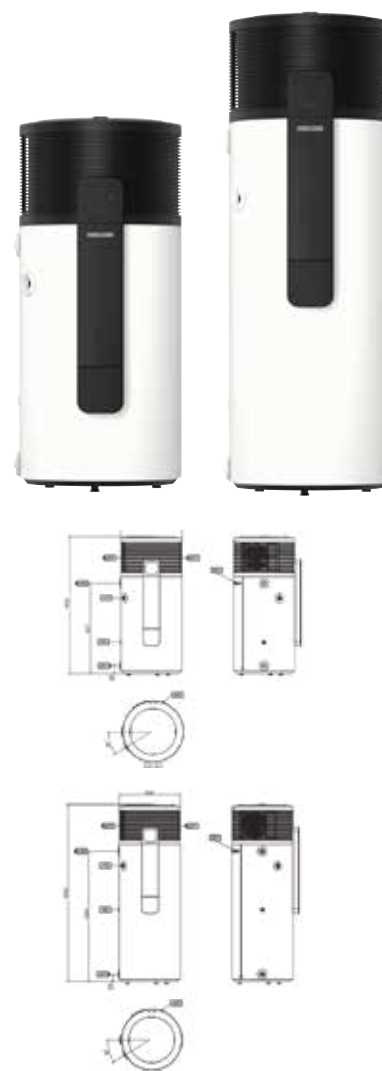

| Type                                                                      |     | SHP-O 200 Plus         | SHP-O 300 Plus         |
|---------------------------------------------------------------------------|-----|------------------------|------------------------|
| Article no.                                                               |     | 204472                 | 204473                 |
| Height x diameter                                                         | mm  | 1478 x 650             | 1903 x 650             |
| Weight (empty)                                                            | kg  | 98                     | 117                    |
| Weight (filled)                                                           | kg  | 114                    | 123                    |
| Nominal capacity                                                          | L   | 200                    | 300                    |
| Min./max. application limits*                                             | °C  | -6 / +43               | -6 / +43               |
| Max. DHW temperature with heat pump                                       | °C  | 65                     | 65                     |
| Power supply                                                              |     | 1/N/PE 220-240 V 50 Hz | 1/N/PE 220-240 V 50 Hz |
| Average power consumption, heat pump (230 V) (A19/W15-61 I AS/NZS 5125.1) | kW  | 0.45                   | 0.44                   |
| Auxiliary heater power consumption                                        | kW  | 1.5                    | 1.5                    |
| Max. operating current v                                                  | A   | 9.88                   | 9.88                   |
| Hot water outlet                                                          |     | G 1                    | G 1                    |
| PTR Valve                                                                 | kPa | 850                    | 850                    |
| Energy efficiency class                                                   |     | A+                     | A+                     |
| Refrigerant                                                               |     | R290 (152g)            | R290 (152g)            |
| GWP                                                                       |     | 0.02 (IPCC)            | 0.02 (IPCC)            |
| Timer                                                                     |     | Functionality via app  | Functionality via app  |
| Sound pressure level at 3m distance, free field (EN 12102) dB(A)          |     | 40.7                   | 40.7                   |
| COP (EN16147 / A20)                                                       |     | 4.27                   | 4.21                   |

\*Element will be used in colder climates

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this data sheet are for reference only.