


Product Specifications

PLASTEC


DWV Expander Joints

with 60mm, 100mm, 150mm, 200mm & 300mm Expansion

- Ideal for pipe repair work
- Complete with Internal stop
- Used in conjunction with Swivel Joint for reactive soils
- Water tight seal

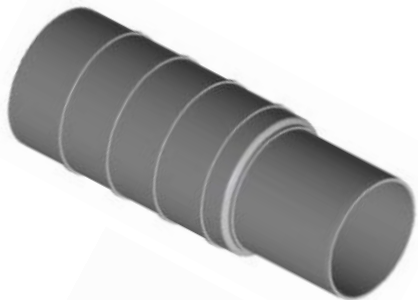


ID	Ø (MM)	INLET	OUTLET	MAX EXPAN.	CTN QTY
15131	90	Pipe size	Socket	100	11
15130	100	Pipe size	Socket	150	12
15642	150	Pipe size	Socket	200	6

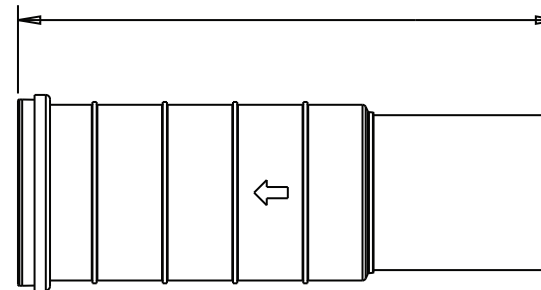


15131
Install position: 258mm
+/- 50mm Expansion/Contraction

15130
Install Position: 384mm
+/- 75mm Expansion/Contraction

15642
Install Position: 180mm
+/- 75mm Expansion/Contraction

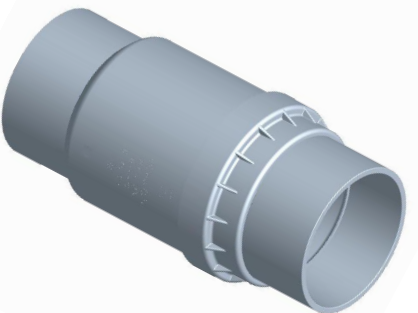

ID	Ø (MM)	INLET	OUTLET	MAX EXPAN.	CTN QTY
18798	100	Socket	Socket	60	7
18823	225	Pipe size	Socket	200	2
20638	100	Socket	Pipe size	100	5
20640	100	Socket	Socket	100	5
20642	100	Socket	Spigot	100	5

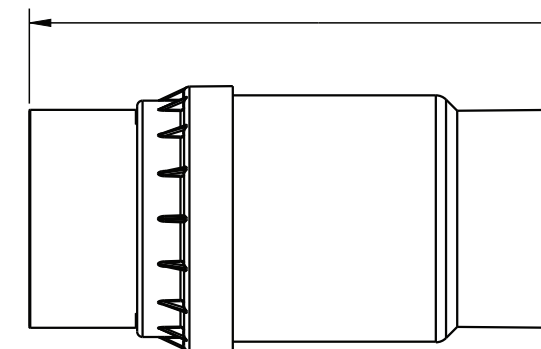

18798
Install position: 189mm
+/- 30mm Expansion/Contraction

18823
Install Position: 498mm
+/- 100mm Expansion/Contraction

20638
Install Position: 293mm
+/- 50mm Expansion/Contraction

20640
Install Position: 299mm
+/- 50mm Expansion/Contraction

20642
Install Position: 296mm
+/- 50mm Expansion/Contraction

07 5413 4444 - www.plastec.com.au

Specifications are correct as at 06/03/2023, but are subject to change at any time without notice.