


Ezy-Push® CP-BS Lead Safe™ Timeflow Push Button Pillar Tap - 6 Sec

Product Code: 173.15.21.00

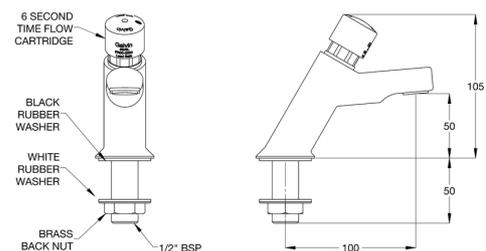

The Galvin Ezy-Push® CP-BS Lead Safe™ Timeflow Push Button Pillar Tap (6 Sec) is ideal for use in schools, end of trip facilities, public washrooms and areas of high use.

Features

- Vandal resistant push button design
- Clean hygienic design
- Self-closing operation
- Timeflow taps are designed to operate at full mains pressure
- Low maintenance and easy to operate
- Smooth round design to facilitate easy clean and help reduce dirt and bacteria growth
- Complies with NSW Education EFSG Guidelines

Technical Information

- WELS: 6 Star Rating (5.0L/min)
- Nominal Flow Rate (LPM): 4.87
- WaterMark: AS 3718 Lic. WMKA0034

- Inlet: 1/2" BSP - Male
- Outlet: Flow Straightener
- Headwork: Timeflow Cartridge - 6 Sec +/- 2 Sec
- Working Temperature Range (°C): 5 Min - 65 Max
- Working Pressure Range (kPa): 100 Min - 500 Max
- Construction: Lead Safe™ DZR Brass*
- Finish: Chrome

Spare Parts

- [173.92.25.00](#) Ezy-Push® CP-BS Lead Safe™ Timeflow Push Button Replacement Cartridge - 6 Sec

Alternative Product Options

- [173.15.41.00](#) Ezy-Push® CP-BS Lead Safe™ Timeflow Push Button Pillar Tap - 15 Sec

Superseding Products

- **368696** Ezy-Push® CP-BS Timeflow Push Button Pillar Tap - 6 Sec



Environmental Sustainability

We are ISO 14001 certified and take sustainability seriously. Our products are environmentally responsible designed to be healthier for users, save water and/or energy, and minimise carbon footprint. Our target is to reduce our carbon footprint by 25%, and the use of non-recyclable/non-compostable materials across the company (e.g. plastics) by 50%.

Warranty

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit www.galvinengineering.com.au to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

While all reasonable care has been taken in compiling the information in this document, the designs, dimensions and products shown are indicative only and should not be relied upon without our prior approval. Due to our policy of continuous development, we reserve the right to alter any details of specifications or products without notice. All information, drawings, technical specifications and product designs remain the property of Galvin Engineering Pty Ltd.

Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.

Within Australia: **1300 514 074**

Outside Australia: P: +61 (0)8 9338 2344

sales@galvinengineering.com.au

www.galvinengineering.com.au



**A family
owned
Australian
business**

