
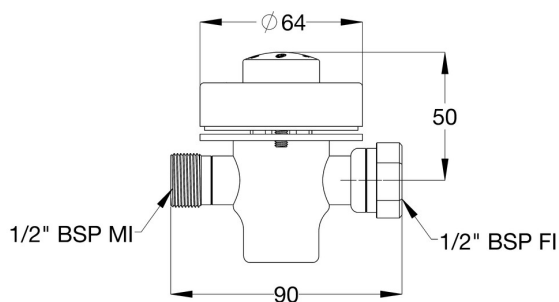


# Ezy-Push® CP-BS Lead Safe™ Timeflow Push Button Concealed Shower Control Valve - 15 Sec

Product Code: 173.61.45.00

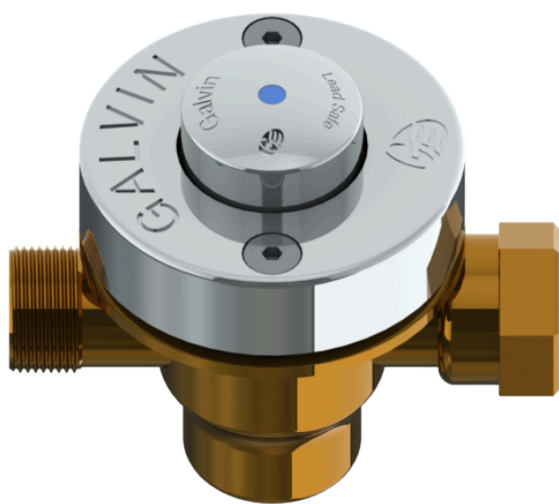

The Galvin Ezy-Push® Lead Safe™ Timeflow Push Button Concealed Shower Control Valve (15 Sec) is designed to suit the increasing need for the conservation of water and the minimisation of vandalism. Constructed from dezincification resistant brass the Ezy-Push® range delivers a constant flow irrespective of pressure to provide a controlled stream.

## Features

- Manufactured using Lead Safe™ DZR Brass with less than 0.25% lead content\*
- Shower control valve taps are designed to operate at full mains pressure
- The valve has a unique handsfree self-closing operation
- Water saving and vandal resistant
- Low maintenance and easy to operate
- High quality chrome finish for easy cleaning and hygiene maintenance

## Technical Information

- WaterMark: AS/NZS 3718 Lic. WKMA0034
- Nominal Flow Rate (LPM): 5

- Inlet: ½" BSP - Female
- Outlet: ½" BSP - Male
- Headwork: Time Flow Cartridge
- Working Pressure Range (kPa): 100 Min - 500 Max
- Working Temperature Range (°C): 5 Min - 65 Max
- Construction: Lead Safe™ DZR Brass
- Finish: Chrome

### Superseding Products

- **368753** Ezy-Push® CP-BS Timeflow Push Button Concealed Shower Control Valve



### Environmental Sustainability

We are ISO 14001 certified and take sustainability seriously. Our products are environmentally responsible designed to be healthier for users, save water and/or energy, and minimise carbon footprint. Our target is to reduce our carbon footprint by 25%, and the use of non-recyclable/non-compostable materials across the company (e.g. plastics) by 50%.

### Warranty

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit [www.galvinengineering.com.au](http://www.galvinengineering.com.au) to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

While all reasonable care has been taken in compiling the information in this document, the designs, dimensions and products shown are indicative only and should not be relied upon without our prior approval. Due to our policy of continuous development, we reserve the right to alter any details of specifications or products without notice. All information, drawings, technical specifications and product designs remain the property of Galvin Engineering Pty Ltd.

Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.

Within Australia: **1300 514 074**

Outside Australia: P: +61 (0)8 9338 2344

[sales@galvinengineering.com.au](mailto:sales@galvinengineering.com.au)

[www.galvinengineering.com.au](http://www.galvinengineering.com.au)



**A family  
owned  
Australian  
business**

