



CONSOLIDATED BRASS TAPWARE

Proudly manufactured in Australia

CB Ideal Tapware Pty Ltd | 1a Deloraine Road, Edwardstown, South Australia, 5039

Phone: +61 (08) 8276 6766 | Email: sales@cbideal.com.au | Print out generated: 1st of November 2024 ACST

Roulette Wall Sink Set with Gooseneck Outlet

SKU: RU3114RB

Unit of Measure Set

- Please be advised that Made to Order (MTO) items manufactured to your instructions are non-returnable.

Please select options below...# Required Fields

Finish Code | Metal Finish #

RB | Raw Brass

Please note this is a maturing/living metal finish.

Option: Handle Spoke Style

☐ I would like to choose a Roulette handle style variant.

Option: Engraved Hot & Cold Buttons

☐ Upgrade to Engraved Buttons

Option: Upgrade to Rapid Action Spindles


☐ Upgrade to Rapid Action Spindles

Additional Customisation Options

☐ I want to customise this item.



Photo: RU3114 in Chrome Plate (CP) finish

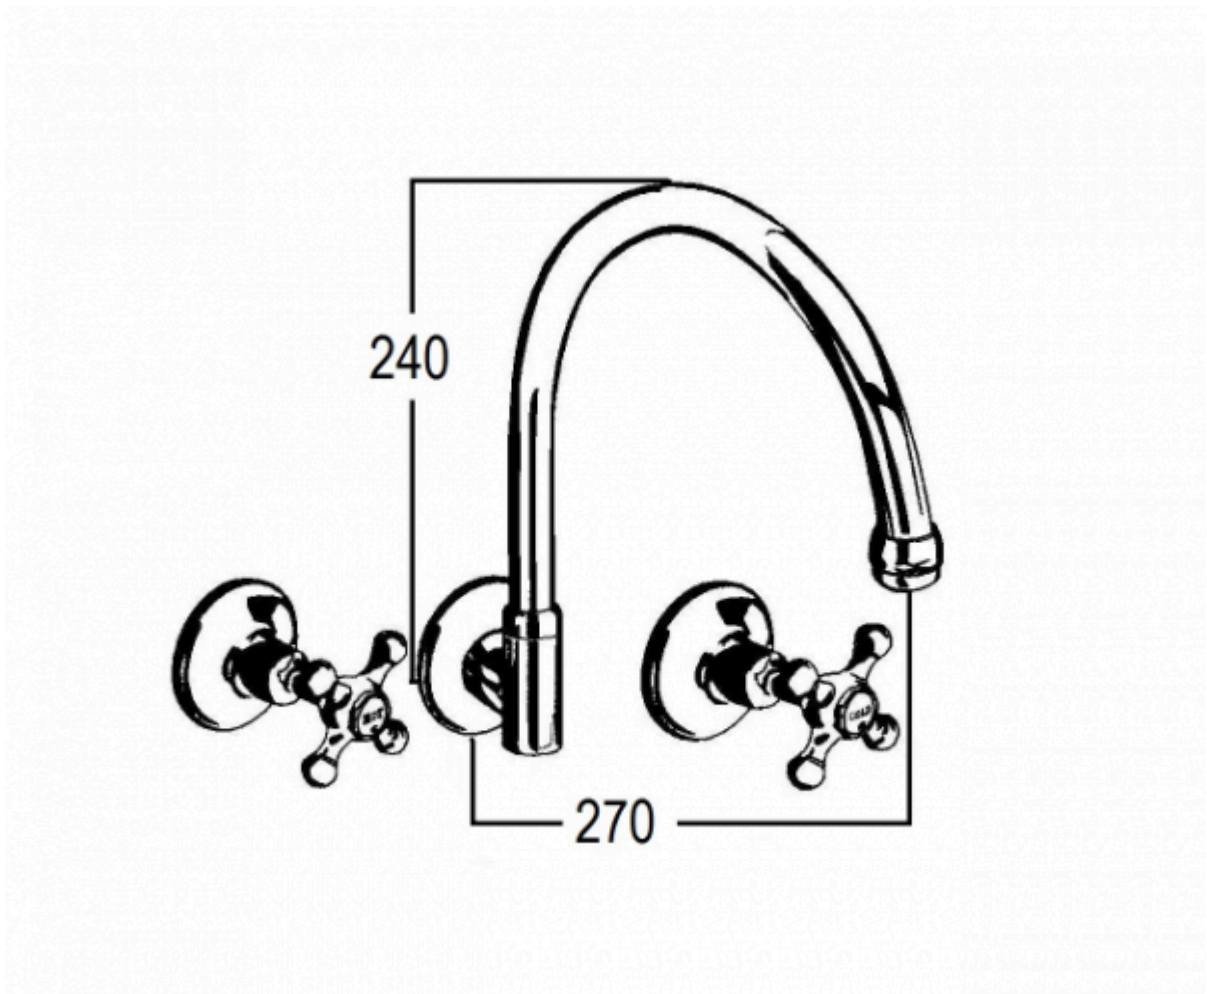

Details

Roulette Wall Sink Set with Gooseneck Outlet includes two wall top assemblies and the swivel outlet.

Installation Requirement:

Plumber to supply and install a normal in-wall breaching piece.

The breach in the wall needs to have two 5/8" BSP female seats - the normal jumper valve type breach in Australia.

The breach in the wall needs to have one 1/2" BSP male thread for the outlet.

If replacing an existing similar tapware set it is likely this breach type is pre-existing in the wall. Please consult with your plumber.

International customers please consult with our sales staff as further components and adapters may be required.

Please refer to the [Wall Top Assembly Installation Depth](#) information page for checking the required in wall body depth from the finished wall face (RU2043).

Additional Information

Product Function	Wall Sink Set
Style Association	Roulette
Material	DR Brass
Handle Type	Cross Handle
Spindle Type	Splined Spindle
Cartridge / Valve	Jumper Valve
Turning Type	Full Turn Standard Action, is upgradable to Rapid Action (1/4 Turn) with Hydroseal Valve
Outlet Type	Swivel Outlet, Optionally Fixed on Installation
Outlet Styling	Sink Gooseneck Outlet
Outlet Reach (mm to Aerator or Rose)	215 Reach (270 Including Wall Base)
Water Efficiency Star (WELS) Rating	4 Stars
Flow Rate (Litres Per Minute)	7.5 Litres Per Minute
Suitable for Gravity Feed	Yes
Suitable for Hot Water Units	Yes
Maximum operating pressure (kPa)	Suitable for High/Mains Pressure / 500 kPa (Australian Standards AS/NZS 3500 and the Plumbing Code of Australia)
Maximum Working Temperature (Degree C)	65
Relevant Standards	AS 3718:2021, AS/NZS 4020:2018

Quantity Unit of Measure	Set
Warranty	5 Years
WELS Licence	WELS Licence 0091
WELS Registration	To7776 (V)