


# Ezy-Push® CP-BS Lead Safe™ Push Button Hose Tap - Cold

Product Code: 172.47.13.01

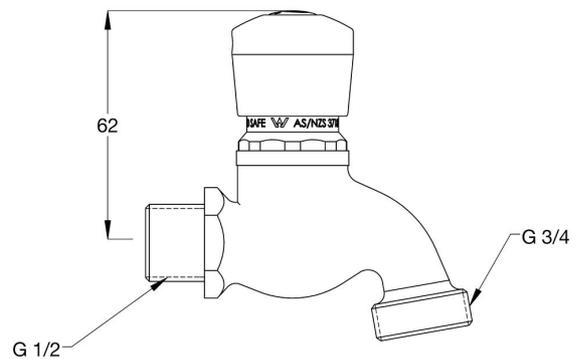

Our range of Ezy-Push® Push Button tapware is reliable and durable. It is designed to suit the increasing need for the conservation of water and the minimisation of vandalism.

## Features

- Vandal resistant push button design with constant flow regardless of pressure
- Low maintenance
- Clean hygienic design
- Water saving
- Easy to operate
- Finished in bright chrome plate for easy cleaning and durability
- Manufactured using Lead Free DZR Brass with less than 0.25% lead content
- Australian Made; therefore, spare parts and support are available locally, reducing maintenance and downtime costs

## Technical Information

- Nominal Flow Rate (LPM): 5.6
- WaterMark: AS 3718 Lic. WMKA0034

- Inlet: G 3/4" BSP - Male
- Headwork: Push button
- Operating temperature range (°C): 5 Min - 60 Max
- Operating pressure range (kPa): 100 Min - 500 Max
- Construction: Lead Free DZR Brass\*
- Finish: Chrome

**Note:** This item does not require WELS Rating.

### Superseding Products

- **35519** Ezy-Push® CP-BS Push Button Hose Tap - Cold



### Environmental Sustainability

We are ISO 14001 certified and take sustainability seriously. Our products are environmentally responsible designed to be healthier for users, save water and/or energy, and minimise carbon footprint. Our target is to reduce our carbon footprint by 25%, and the use of non-recyclable/non-compostable materials across the company (e.g. plastics) by 50%.

### Warranty

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit [www.galvinengineering.com.au](http://www.galvinengineering.com.au) to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

While all reasonable care has been taken in compiling the information in this document, the designs, dimensions and products shown are indicative only and should not be relied upon without our prior approval. Due to our policy of continuous development, we reserve the right to alter any details of specifications or products without notice. All information, drawings, technical specifications and product designs remain the property of Galvin Engineering Pty Ltd.

Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.

Within Australia: **1300 514 074**  
 Outside Australia: P: +61 (0)8 9338 2344  
[sales@galvinengineering.com.au](mailto:sales@galvinengineering.com.au)  
[www.galvinengineering.com.au](http://www.galvinengineering.com.au)



**A family  
 owned  
 Australian  
 business**

