


# Ezy-Wash® BS Lead Safe™ Lever Action Pre-Rinse TF83/85 Hob SBA J/V - Hot (LH)

Product Code: 181.94.31.02

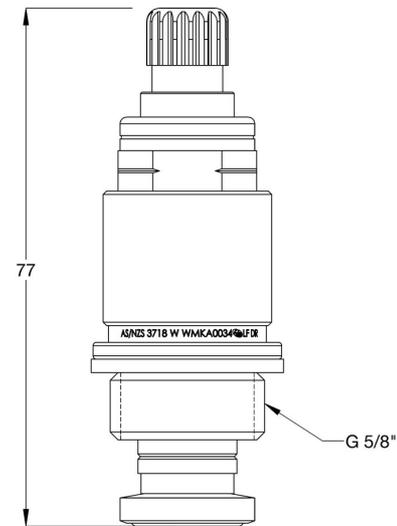

The lead free Galvin Ezy-Wash® Brass Lever Action SBA range is designed for use with Ezy-Wash® Pre-Rinse units. These components are available with ceramic cartridge and jumper valve headworks.

## Technical Information

- WaterMark: AS 3718 Lic. WMKA0034
- Inlet: G 5/8" BSP – Male
- Headworks: Jumper Valve
- Working Pressure Range (kPa): Min 50 - Max 500
- Working Temperature Range (°C): Min 5 - Max 65
- Construction / Finish: Lead Free DZR Brass

## Superseding Products

- **46722** Ezy-Wash® BS Lead Safe™ Lever Action Pre-Rinse TF83/85 Hob SBA J/V - Hot

## This product is compatible with

- **181.00.33.00** Ezy-Wash CP-BS Lead Safe™ Hob Mtd Exposed Mixing Pre-Rinse Unit Type 83 MI Inlet - Standard

- [181.03.34.09](#) Ezy-Wash® CP-BS Lead Safe™ Hob Mtd Twin Mixer Pre-Rinse Unit Type 84 Flex Tail - Pot Filler (Compact)
- [181.14.38.03](#) Ezy-Wash® CP-BS Lead Safe™ Powersoak Pre-Rinse Unit - Pot Filler
- [181.14.38.00](#) Ezy-Wash® CP-BS Lead Safe™ Powersoak Pre-Rinse Unit - Standard
- [181.10.38.00](#) Ezy-Wash® CP-BS Lead Safe™ Wall Mtd Exposed Mixing Pre-Rinse Unit Type 83 FI - Standard
- [181.17.05.04](#) Ezy-Wash® CP-BS Lead Safe™ Wall Mtd No Stop Pre-Rinse Unit Type 80 FI Inlet - Pot Filler (250mm)
- [181.11.71.00](#) Ezy-Wash CP-BS Lead Safe™ Wall Mtd Exp Mixing Unit Type 75 FI Inlet with 200 Reach
- [181.12.72.00](#) Ezy-Wash CP-BS Lead Safe™ Wall Mtd Exp Mixing Unit Type 76 FI Inlet with 300 Reach
- [181.13.73.00](#) Ezy-Wash CP-BS Lead Safe™ Wall Mtd Exp Mixing Unit Type 77 FI Inlet with 400 Reach
- [181.91.30.02](#) Ezy-Wash CP-BS Lead Safe™ Pot Filler Attachment Type 85 J/V 250 Reach
- [181.91.31.02](#) Ezy-Wash® CP Lead Safe™ Pot Filler Attachment Type 100 J/V 305mm Reach
- [181.91.32.02](#) Ezy-Wash® CP Lead Safe™ Pot Filler Attachment Type 150 J/V 305mm Reach



### Environmental Sustainability

We are ISO 14001 certified and take sustainability seriously. Our products are environmentally responsible designed to be healthier for users, save water and/or energy, and minimise carbon footprint. Our target is to reduce our carbon footprint by 25%, and the use of non-recyclable/non-compostable materials across the company (e.g. plastics) by 50%.

### Warranty

Galvin Engineering products are covered under our Manufacturer's Warranty. Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS 3500 and NCC Volume Three, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Please visit [www.galvinengineering.com.au](http://www.galvinengineering.com.au) to view the full warranty, our Installation Compliance and Maintenance & Cleaning information as well as any other additional information.

While all reasonable care has been taken in compiling the information in this document, the designs, dimensions and products shown are indicative only and should not be relied upon without our prior approval. Due to our policy of continuous development, we reserve the right to alter any details of specifications or products without notice. All information, drawings, technical specifications and product designs remain the property of Galvin Engineering Pty Ltd.

Our Lead Safe™ product range is compliant with the Lead Free Requirements of the NCC 2022 Vol. Three, Clause A5G4(2) and NSF/ANSI 372.

Within Australia: **1300 514 074**  
 Outside Australia: P: +61 (0)8 9338 2344  
[sales@galvinengineering.com.au](mailto:sales@galvinengineering.com.au)  
[www.galvinengineering.com.au](http://www.galvinengineering.com.au)



**A family  
 owned  
 Australian  
 business**

