

MICRON MB3

INLINE QUICK-CHANGE FILTRATION SYSTEM

General Information

Upgrade your kitchen with the top-of-the-line MB3 Quick-Change Water Filter. This filter turns your regular faucet into a source of clean, refreshing water with its advanced three-stage filtration system (5 micron Sediment, GAC Carbon, and CTO Carbon Block).

The dual carbon filtration offers extra absorption for better impurity removal, while the quick-change feature makes replacing cartridges easy. Enjoy exceptional, great-tasting water as the MB3 removes fine sediment, chlorine, VOCs, heavy metals and other chemicals. Perfect for both residential and commercial use, the MB3 provides easy, top-quality water purification for everyone.

Designed for mains water.



Features and Benefits

- Three-Stage Inline Filtration System featuring a 5 micron PP Sediment Filter, Granular Activated Carbon and Carbon Block CTO Filter
- 5 micron PP Sediment Pre-Filter for removal of fine particles, sand, and rust
- Excellent absorption capacity of chlorine, chemicals, VOCs, heavy metals, unpleasant tastes and odours
- High flow capacity of 2-12L/min

Cartridge Replacement and Timeframe Suggestions

MB-05 5 micron PP Sediment Filter cartridge to be replaced every 3 - 6 months.

MB-33 Granular Activated Carbon Filter cartridge to be replaced every 6 - 12 months.


MB-CTO Carbon Block Filter cartridge to be replaced every 6 - 12 months.



Version 1_Apr 2025

MICRON MB3

INLINE QUICK-CHANGE FILTRATION SYSTEM

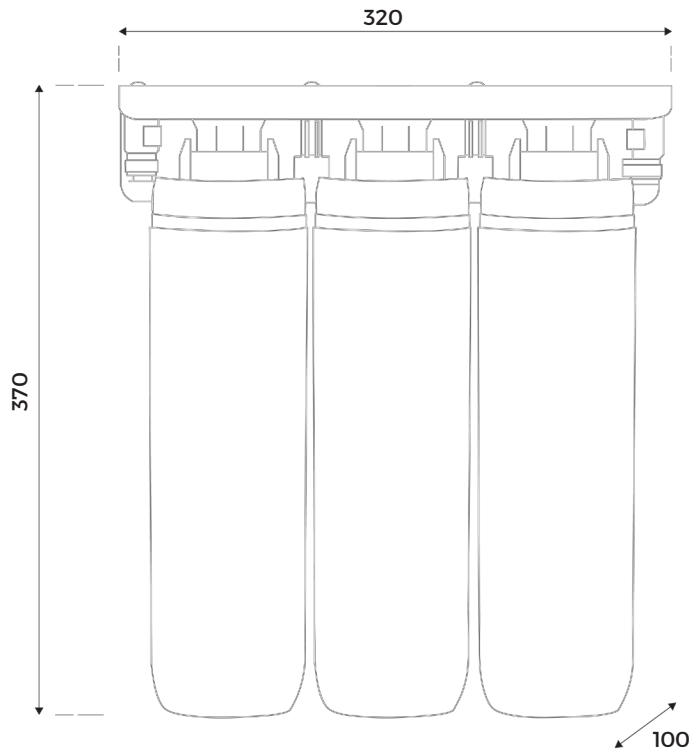

Measurements in millimetres

MB3 Specifications

| | |
|-------------------------------------|---|
| Model | MB3 |
| Product Description | Triple Inline Water Filter 1st stage: 5 micron PP Sediment Filter (Model: MB-05) 2nd stage: Granular Activated Carbon Filter (Model: MB-33) 3rd stage: CTO Carbon Block Filter (Model: MB-CTO) |
| Filtration Capacity | Removes dirt, sand, silt, rust and fine particles to nominal size Reduces chlorine, VOCs, heavy metals, chemicals, odour and unpleasant taste |
| Flow Rate | 2 - 12L/min |
| Micron Rating | 5 micron* |
| Min/Max Pressure | 100 - 550 kPa |
| Min/Max Temperature | 4 - 42°C (must not freeze / cold water only) |
| Connection | Standard size: 3/8" BSP (10mm) |
| Mounting Options | Vertical Only |
| Cartridge Size | 2.5" x 10" Quick-Change |
| Compatible Filter Cartridges | MB Quick-Change Filter Series |
| Dimensions | 370 mm (H) x 320 mm (L) x 100 mm (W) |
| Certification | WaterMark |
| Warranty | 3 Years [^] |

[^] 3 year warranty covering parts only, excluding cartridges. Use only genuine Micron Water Filters cartridges. Filter replacement timeframes are guidelines only and may vary with water quality and usage.

* Micron rating is nominal.