

MICRON MWF-WH202

CLASSIC SERIES - TWIN WHOLE HOUSE FILTRATION SYSTEM

General Information

Engineered for mains water, the MWF-WH202 System is meticulously designed to provide clean, fresh water for your home or business. Its advanced twin-stage filtration process ensures water is filtered to an exceptional 5 micron* level, effectively eliminating sediment particles, chlorine, and harmful by-products such as trihalomethanes (THMs), while enhancing taste and odour.

Constructed with UV-resistant, high-grade 316 stainless steel brackets and external cover, this system is built to withstand harsh external elements, ensuring durable performance and peace of mind.

Designed for mains water supply.



Features and Benefits

- High flow twin filtration for both commercial and residential use
- Standard size 4.5" x 20" housings – providing 100% more capacity than 4.5" x 10"
- Greater contact time, flow rates, longevity and chemical removal
- Suitable for small to large homes with 2 or more bathrooms
- 5 micron Sediment Pre-Filter removes larger particles like sand, dirt, rust, and debris from the water
- CTO Carbon Block Filter removes chlorine, volatile organic compounds (VOCs), pesticides, herbicides and other chemicals, improving taste and odour
- UV Resistant Marine Grade 316 Stainless Steel brackets and external cover
- Brass thread connection
- 1/4" top mount pressure gauge ports and bleed valve

Cartridge Replacement and Timeframe Suggestions


MWF20-5SPP 5 micron PP Sediment Filter cartridge to be replaced every 6 - 12 months.

MWF20-CTO Coconut Shell Carbon Block Filter to be replaced every 6 - 12 months.



MICRON MWF-WH202

CLASSIC SERIES - TWIN WHOLE HOUSE FILTRATION SYSTEM

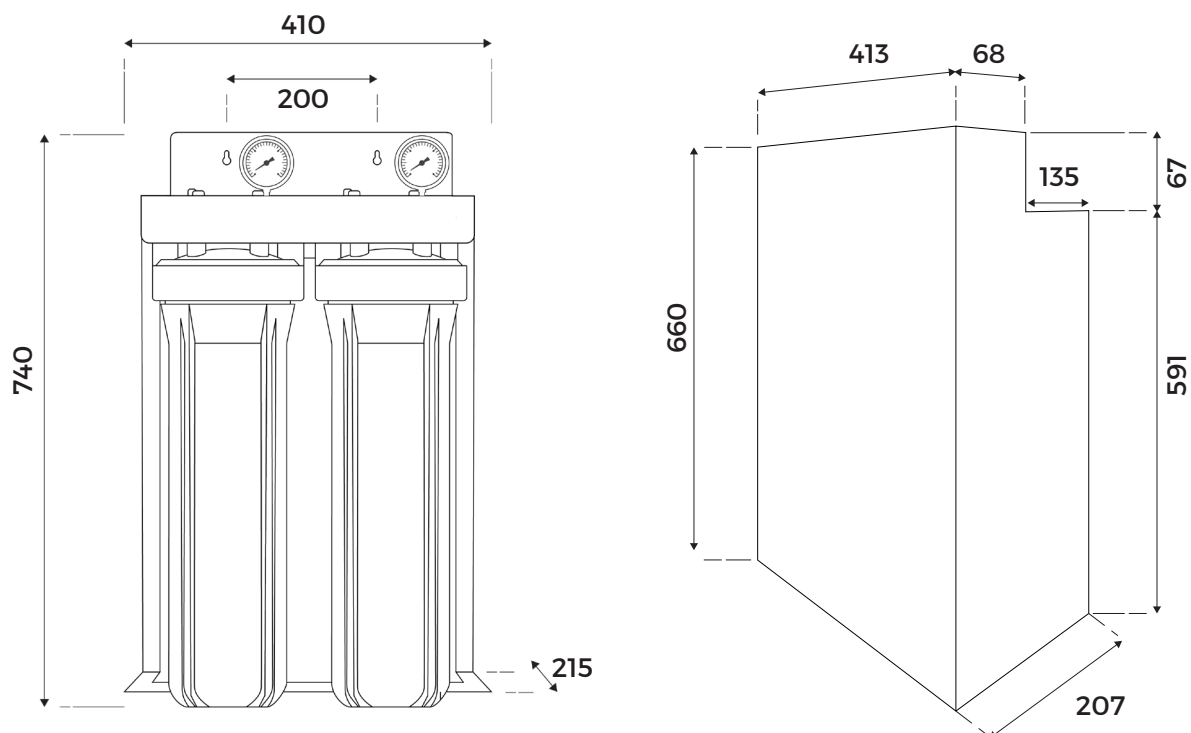

Measurements in millimetres

Twin Classic Series Specifications

Model	MWF-WH202A
Product Description	Twin Whole House Filtration System - Classic 1st stage: 5 micron PP Sediment Pre-Filter (Model: MWF20-5SPP) 2nd stage: CTO Coconut Shell Carbon Block Filter (Model: MWF20-CTO)
Filtration Capacity	Removes dirt, sand, silt, rust and fine particles to nominal size Reduces chlorine, VOCs, chemicals, odour and unpleasant taste
Flow Rate	35L/min
Micron Rating	5 micron*
Min/Max Pressure	100-1600 kPa
Min/Max Temperature	4-42°C (must not freeze / cold water only)
Connection	Standard Port Size 1" - Brass Thread
External Cover	316 Marine Grade Stainless Steel mounting frame and cover
Cartridge Size	4.5" x 20"
Compatible Filter Cartridges	MWF20 Filter Series
Dimensions	With Cover: 413 mm (W) x 225 mm (D) x 740 mm (H)
Certification	WaterMark
Warranty	3 Years [^]

[^] 3 year warranty covering parts only, excluding cartridges. Use only genuine Micron Water Filters cartridges. Filter replacement timeframes are guidelines only and may vary with water quality and usage.

* Micron rating is nominal.